


REFERENCE	BT_2010_FR20_02_UK
DATE	18th February 2010
SUBJECT	Transponder position
PART	Transponder


Transponder position on the car

The transponder must be located as shown on the picture below :

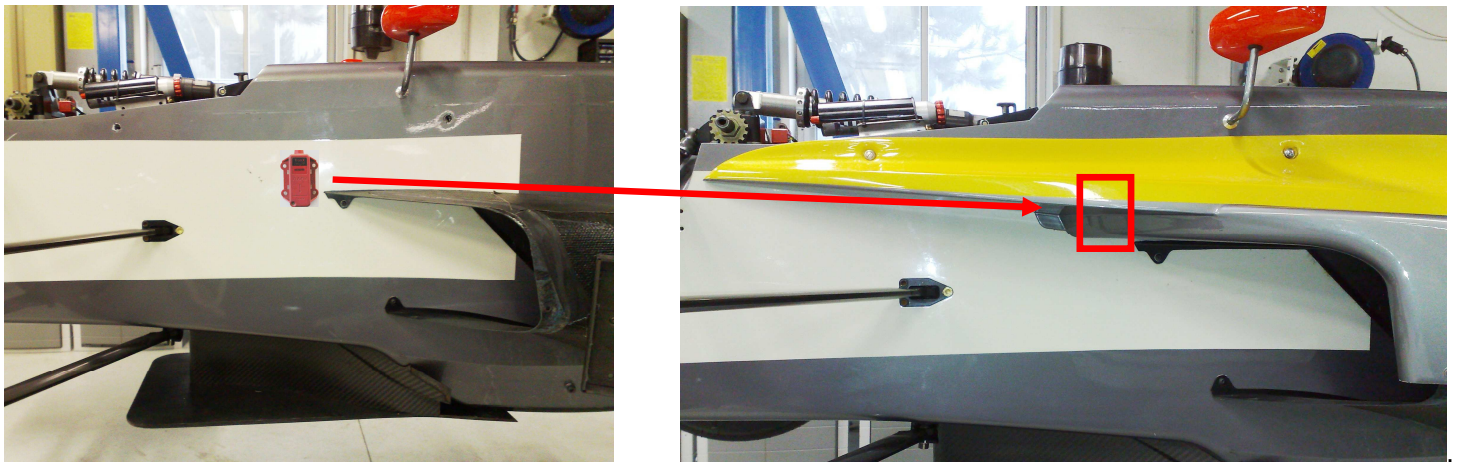

The transponder must be maintained with Velcro on the chassis, in front of the upper face of the left-hand radiator duct, inside the left-hand sidepod.

In order to hide the transponder in the sidepod, you must trim the sidepod as shown below:

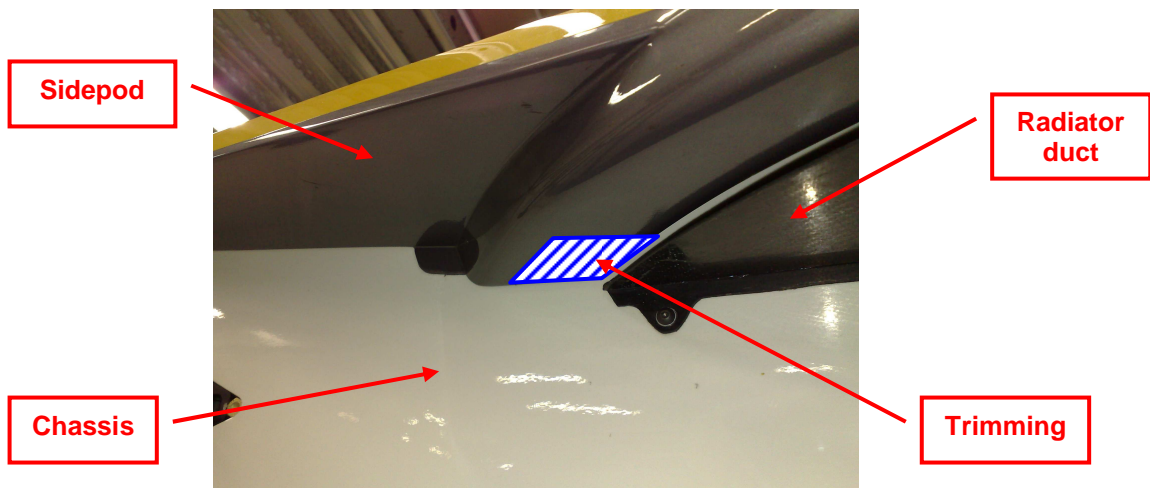

For this trimming, don't forget that usually when you remove the sidepod, you slide it forward before to remove it.

We remind you that there is a 2 ways Superseal female connector on the engine loom to connect the transponder easily. This connector is attached below the left-hand radiator duct.